




VpCI™ METALWORKING PRODUCTS

VpCI-345

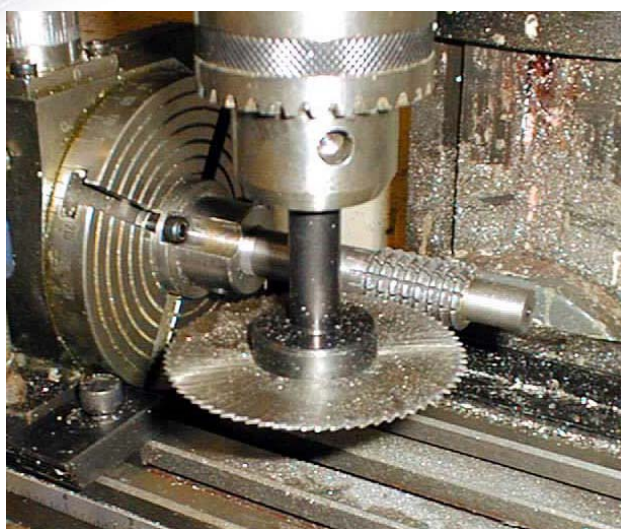

PRODUCT DESCRIPTION

VpCI-345 is a premium water-based metalworking lubricant concentrate for difficult-to-produce metal stampings, tubular products and machined parts. VpCI-345 is superior to petroleum-based coolant rust preventives. When used as directed, VpCI-345 prevents corrosion during in-plant processing, storage and export shipment up to 24 months. VpCI-345 is ideally suited for light-duty machined and polished parts requiring long-term corrosion and surface protection.

VpCI-345 can be effectively used as a coolant in machining applications where maximum cooling is employed. High-performance characteristics of VpCI-345 make it ideally suited for light-duty cutting, milling, turning, drilling, boring, broaching, gear cutting and other machining operations. VpCI-345 can replace neat oils and semi-synthetics when there is a requirement for maximum coating and superior rust inhibiting stability. VpCI-345 is resistant to rancid attack by bacteria. Product life is the same or longer than similar machining fluids.

TYPICAL APPLICATIONS

- In-plant machining
- Protection of hot-rolled, cold-rolled, galvanized and aluminized steel
- Coolant for machining of castings, highly polished pieces and other parts, providing superior protection between machining operations and further processing or assembly

METAL PROTECTED

- Carbon steel
- Stainless steel
- Aluminum
- Galvanized steel
- Zinc
- Cast iron

FEATURES

- Unique vapor phase corrosion inhibitor action protects uncoated and difficult-to-reach areas in castings and stampings
- Excellent wetting
- Economical - VpCI-345 can be diluted with up to 40 parts water
- Protects ferrous and non-ferrous metals
- Easy to remove from metal surfaces with alkaline cleaners (VpCI-410 series)
- Does not contain flammable solvents, reducing fire hazards
- Contains no chlorinated compounds, chromates, or nitrites
- Eliminates cleaning and housekeeping problems associated with rust inhibiting oils



CORTEC
CORPORATION

Environmentally Safe VpCI™/MCI® Technologies

- Gives protection to parts after completion of metalworking operations, thus eliminating the need for further applications of rust preventives
- Rancid stability and resistance to bacterial attack
- Passes ASTM D 4627-86 (Test Method for Iron Chip Corrosion for Water-soluble Metalworking Fluids) at 2.5% by weight
- Weldable

METHOD OF APPLICATION

Short-term protection/Light-duty machining (up to 2 months):

1 part concentrate to 20-40 parts water

Medium-term protection/Medium-duty machining (2 to 23 months):

1 part concentrate to 10-20 parts water

Long-term protection/Heavy-duty machining (up to 24 months):

1 part concentrate to 4-10 parts water

TYPICAL PROPERTIES

Appearance	Clear yellow to amber liquid
Film Type	Dry
Non-volatile Content	32-38%
pH	8.5-9.2 (Neat)
Density	8.8-9.0 lb/gal (1.05-1.08 kg/l)
Removal Methods	Alkaline cleaners (VpCI-410 series)

PACKAGING AND STORAGE

VpCI-345 is available in 5 gallon (19 liter) plastic pails, 5 gallon (208 liter) metal drums, liquid totes and bulk. The product should be sealed and stored in a heated warehouse to avoid freezing. VpCI-345 has a shelf life of 24 months.

FOR INDUSTRIAL USE ONLY

KEEP OUT OF REACH OF CHILDREN

KEEP CONTAINER TIGHTLY CLOSED

NOT FOR INTERNAL CONSUMPTION

CONSULT MATERIAL SAFETY DATA SHEET FOR MORE INFORMATION

LIMITED WARRANTY

All statements, technical information and recommendations contained herein are based on tests Cortec Corporation believes to be reliable, but the accuracy or completeness thereof is not guaranteed.

Cortec Corporation warrants Cortec® products will be free from defects when shipped to customer. Cortec Corporation's obligation under this warranty shall be limited to replacement of product that proves to be defective. To obtain replacement product under this warranty, the customer must notify Cortec Corporation of the claimed defect within six months after shipment of product to customer. All freight charges for replacement products shall be paid by customer.

Cortec Corporation shall have no liability for any injury, loss or damage arising out of the use of or the inability to use the products.

BEFORE USING, USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR ITS INTENDED USE, AND USER ASSUMES ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH. No representation or recommendation not contained herein shall have any force or effect unless in a written document signed by an officer of Cortec Corporation.

THE FOREGOING WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE. IN NO CASE SHALL CORTEC CORPORATION BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.



Distributed by:

4119 White Bear Parkway, St. Paul, MN 55110 USA
 Phone (651) 429-1100, Fax (651) 429-1122
 Toll Free (800) 4-CORTEC, E-mail info@cortecvci.com
 Internet http://www.cortecvci.com

printed on recycled paper 10% post consumer

Revised 7/20/05. Cortec Corporation 1998-2005. All rights reserved. Supersedes: 12/18/00.

